



接口说明 Connection		
符号 Item	尺寸 Size	用途或名称 Service
F	Rc 3/8"	冲洗口
Q	Rc 3/8"	急冷（吹扫）口
D	Rc 3/8"	排液口

△ 注意：请严格依照接口方向接管
Please mark the takeover according to the drawings


剖面 A-A

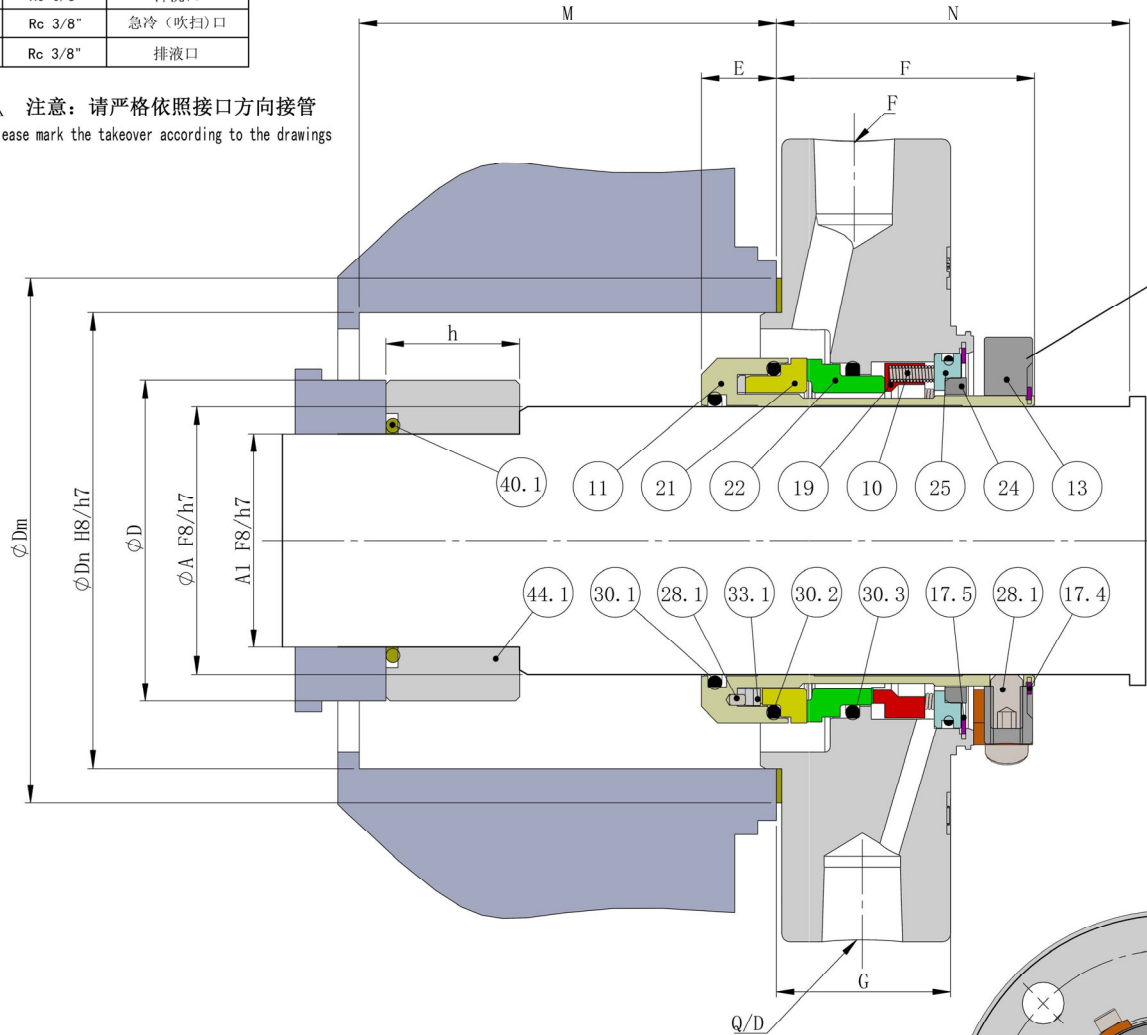

GSMH系列 ISO2858-尺寸信息 (mm)													
A	A1	B	C	D	Dn	Dm	E	F	G	H	M	N	h
30	23	115	95	40	60	72	16.6	39	48.2	12	64	64.5	20
40	30	125	105	50	70	87	18.7	38.8	48.2	12	64	76	20
50	40	148	125	60	85	97	18.15	39.36	48.2	14	78	66	25
60	45	158	135	70	95	108	22	39	48.5	14	78	107	25
80	65	198	170	90	122	143	21.3	39.8	65	18	100	102	30

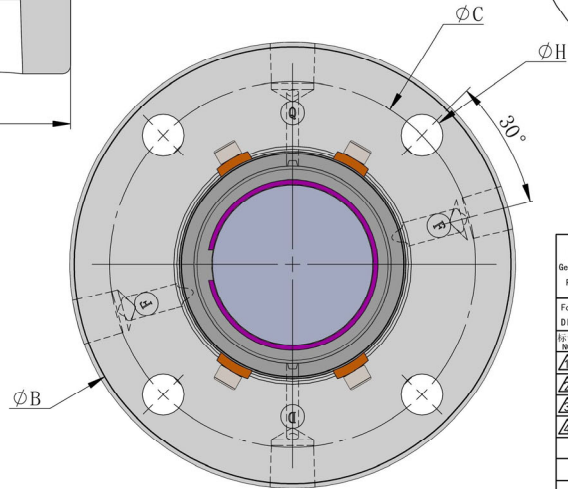

序号 NO.	名称 Name	材质 Material
11	轴套/Sleeve	316SS不锈钢/Stainless Steel
21	动环/Rotary Face	SSIC/TC
22	静环/Stat. Face	Carbon/SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
19	推环/Thrust Ring	316SS不锈钢/Stainless Steel
25	弹簧座/Spring Plate	316SS不锈钢/Stainless Steel
24	Bush环/Bush Ring	M106K
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
33.1	传动环/Drive Ring	316SS不锈钢/Stainless Steel
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	弹簧/Springs	
30.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
14	卡簧/Circlip	304SS不锈钢/Stainless Steel
28.1	紧定螺钉/Drive Screws	304SS不锈钢/Stainless Steel
17.5	卡簧/Circlip	304SS不锈钢/Stainless Steel
14	定位块/Setting Clips	Cu/Brass
27.2	定位螺钉/Clip Screws	304SS不锈钢/Stainless Steel
51	垫片/Gasket	AFI
44.1	限位轴套/Limit Sleeve	316SS不锈钢/Stainless Steel
30.6	O型圈/O-Ring	PTFE

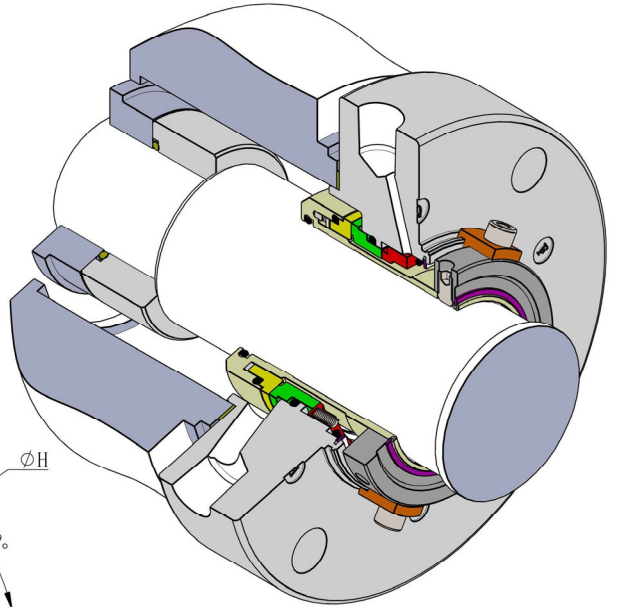

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions		[mm]	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
公差 Tolerances				[mm]	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
Format/图幅 DIN EN ISO 216		A3	第一视角 Projection Method 1		表面粗糙度表示方法符合 Method of indicating surface to			ISO 1302 (μm)	公差符合 Tolerances according to	ISO 2768-m
标记 NO.	描述 Description	日期 Date	姓名 Name							
△										
△										
△										
△										
			设计 Design	日期 Date	姓名 Name	规格型号/TYP NO.				
			校核 Checked			GSMH				
			审核 Approved							
			公差 Tolerance	比例 Scale	材料标记 Material Code	图号/Drawing NO.				
			ISO 8015	1:1						
						质量/Weight 4158.34 g				
						版本: Rev. A				