



接口说明 Connection		
符号 Item	尺寸 Size	用途或名称 Service
F	Rc 3/8"	冲洗口

△ 注意：请严格依照接口方向接管
Please mark the takeover according to the drawings

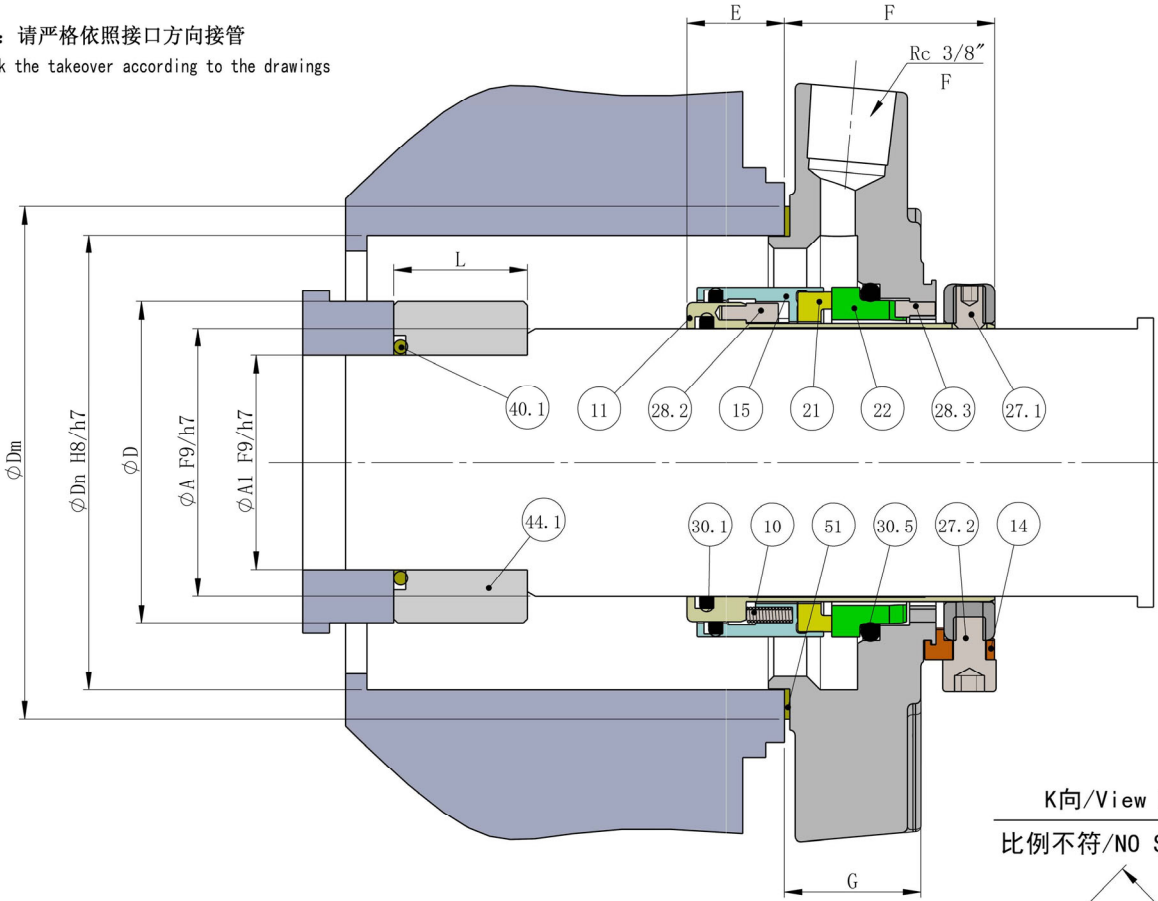


K向/View K

K向/View K
比例不符/NO SCALE

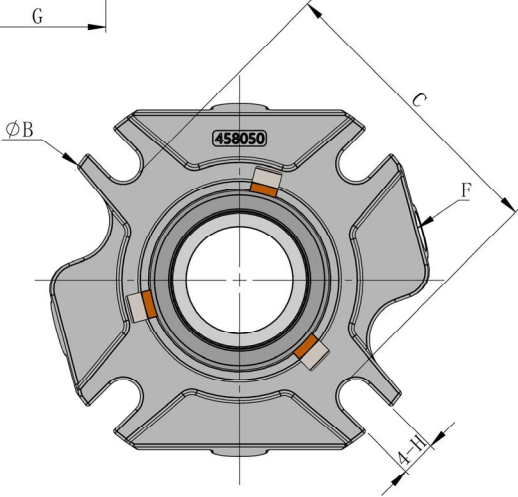

序号 NO.	名称 Name	材质 Material
11	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
15	动环座/Rotary Seat	316SS不锈钢/Stainless Steel
21	动环/Rotary Face	SSIC/TC
22	静环/Stationary Seat	SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	弹簧/Spring	316SS不锈钢/Stainless Steel
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
27.3	限位螺钉/Anti-tamper Screws	316SS不锈钢/Stainless Steel
27.1	紧定螺钉/Drive Screw	316SS不锈钢/Stainless Steel
14	定位块/Setting Clip	316SS不锈钢/Stainless Steel
27.2	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
51	垫片/Gasket	AF1/PTFE
40.1	限位轴套/Intermediate Sleeve	316SS不锈钢/Stainless Steel
40.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez

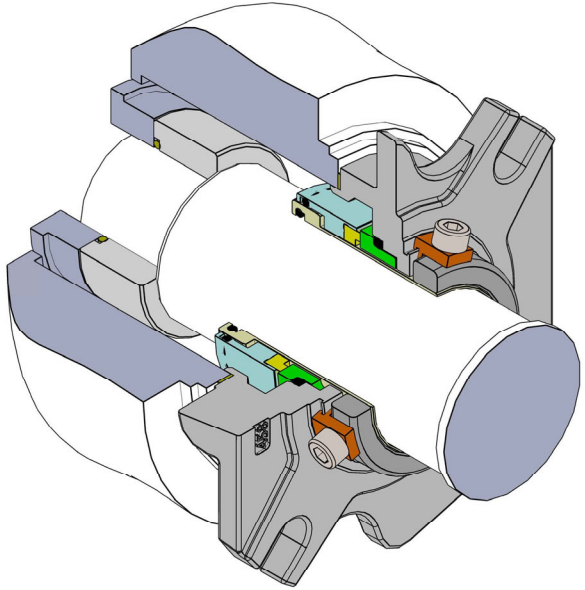

F458系列 ISO2858-尺寸信息 (mm)

A	A1	B	C	D	Dn	Dm	E	F	G	H	L
30	23	115	80	40	60	72	16.3	39.4	25.5	12	20
40	30	125	90	50	70	87	18.2	39.4	25.5	12	20
50	40	148	110	60	85	97	18.2	39.4	25.5	13.2	25
60	45	156	120	70	95	115	20.3	39.4	25.5	13.2	25
80	65	198	152	90	122	143	22.3	38.8	24.4	18	30

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions		[mm]	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	
		公差 Tolerances		[mm]	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	
Format/图幅 DIN EN ISO 216		A3	第一视图 Projection Method 1				表面粗糙度表示方法符合 Method of indicating surface to		ISO1302 (μm)	公差符合 Tolerances according to	ISO 2768-m
标记 NO.	描述 Description	日期 Date	姓名 Name								
△											
△											
△											
△											
			设计 Design	日期 Date	姓名 Name	规格型号/TYPE NO.					
			校核 Checked			ESMH					
			审核 Approved			机械密封					
			公差带 Tolerance	比例 Scale	材料标记 Material Code	图号/Drawing NO.				质量/Weight g	
			ISO 8015	1:1						版本: Rev. A	