

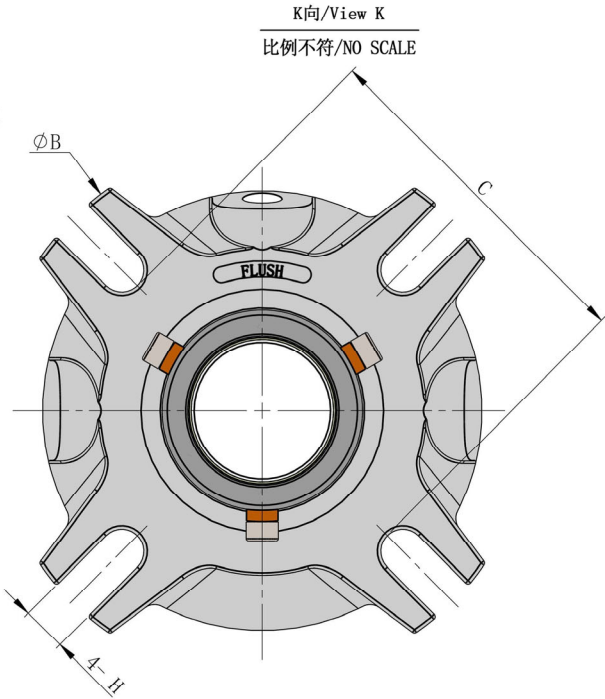


接口说明 Connection	
F	冲洗液接口

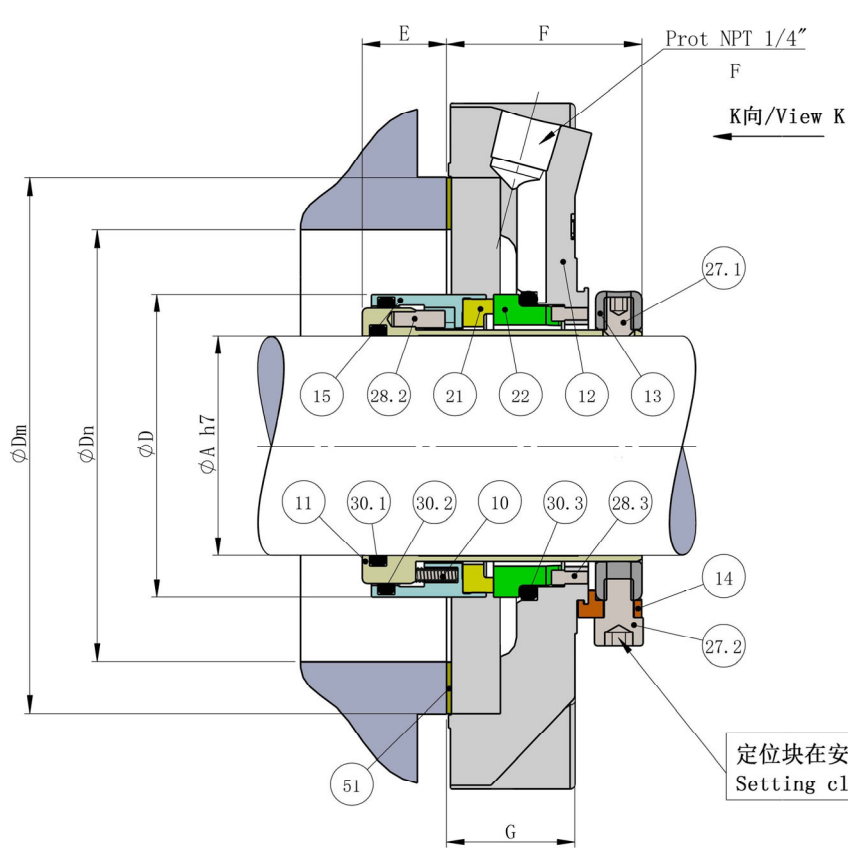

定位块在安装完后要移走
Setting clips removed after installation

序号 No	零件名称 Description	材料 Material
11	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
15	动环座/Rotating Seat	316SS不锈钢/Stainless Steel
21	动环/Rotary Face	Carbon/SSIC/TC
22	静环/Stationary Face	SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
51	垫片/Gasket	PTFE
10	弹簧/Spring	Alloy 276
27.1	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
14	定位块/Setting Clip	铜/Brass
27.2	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
28.2	销钉/Pin	304SS不锈钢/Stainless Steel
28.3	销钉/Pin	304SS不锈钢/Stainless Steel

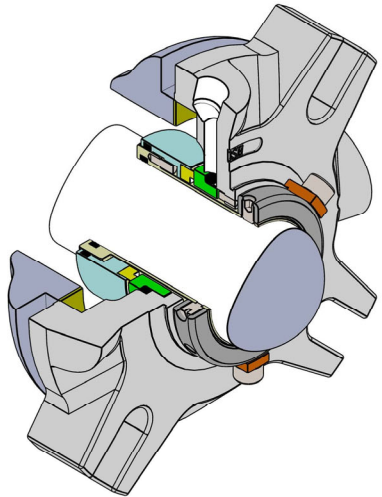

ESM ANSI-尺寸信息 (mm)									
A	B	C	D	Dn	Dm	E	F	G	H
34.925	135.3	86.7	48.97	73	86	19.59	36.03	22.3	14.2
44.45	171.5	112.1	62.18	89	110	17.32	40.02	26.45	14.3
47.625	171.5	112.1	65.35	91	105	17.3	40.2	26.4	14.3
53.975	193	118.5	71.81	98.5	116.5	22.41	37.21	22.85	17.5
63.5	210	137.5	84.13	121	138	17.52	43.5	29.14	17.5
66.675	210	137.5	87.3	117	130	17.52	43.5	29.14	17.5

ESM ANSI-尺寸信息 (Inches)									
A	B	C	D	Dn	Dm	E	F	G	H
1.375	5.327	3.413	1.928	2.874	3.386	0.771	1.419	0.878	0.559
1.750	6.752	4.413	2.448	3.504	4.331	0.682	1.576	1.041	0.563
1.875	6.752	4.413	2.573	3.583	4.134	0.681	1.583	1.039	0.563
2.125	7.598	4.665	2.827	3.878	4.587	0.882	1.465	0.900	0.689
2.500	8.268	5.413	3.312	4.764	5.433	0.690	1.713	1.147	0.689
2.625	8.268	5.413	3.437	4.606	5.118	0.690	1.713	1.147	0.689

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions		[mm]	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
		公差 Tolerances		[mm]	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
Format/图幅 DIN EN ISO 216		A3		第一视角 Projection Method 1		表面粗糙度表示方法符合 Method of indicating surface to		ISO1302 (μm)	公差符合 Tolerances according to	ISO 2768-m
标记/处理 NO. QTY		描述 Description		日期 Date	姓名 Name					
△										
△										
△										
△										
				日期 Date	姓名 Name		规格型号/TYPE NO.			
				设计 Design			ESM ANSI			
				校核 Checked			机械密封			
				审核 Approved						
				公差带 Tolerance	比例 Scale	材料代码 Material Code	图号/Drawing NO.		质量/Weight 3026.14 g	
				ISO 8015	1:1				版本- Rev. A	